


SINGER[®] Dog Collar, Leash and Pouch

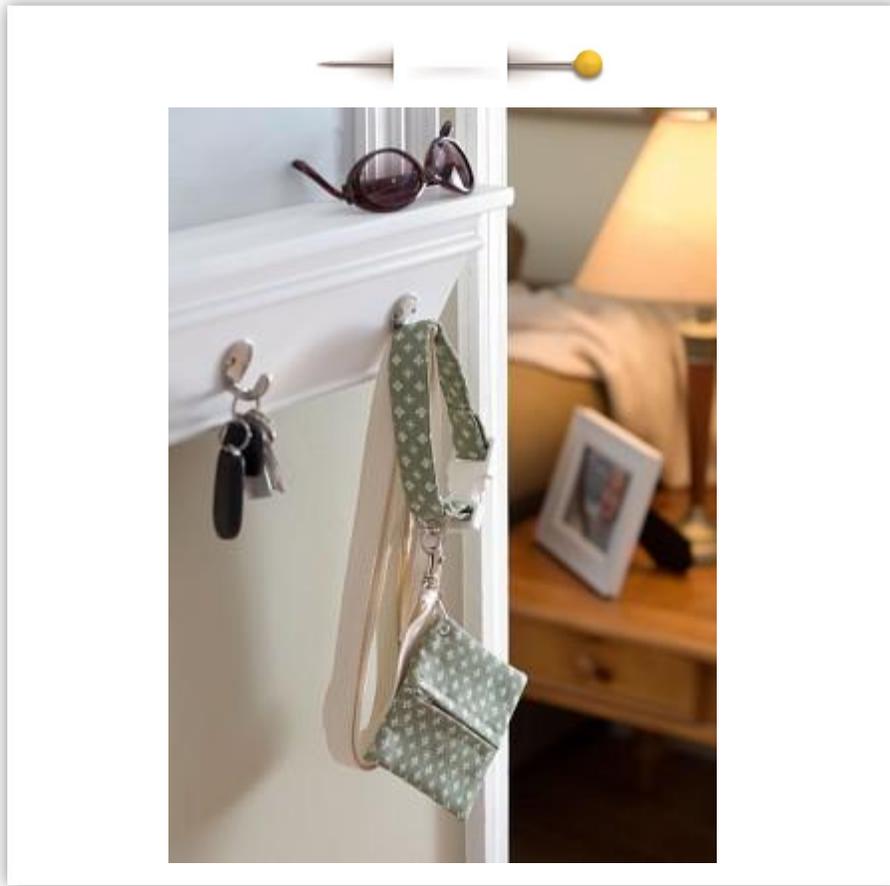

Create a custom collar and leash to suit the personality of your special pup. This project also includes a matching key pouch for you to carry your keys (or those necessary plastic bags!) while walking your canine.

Shopping List:

- ¼ yard fabric
- ¼ yard fusible interfacing
- One 6" nylon coil zipper
- All-purpose sewing thread
- 3 yards of 1" wide webbing (for leash)
- One 1" D-ring
- One 1" parachute clip buckle
- One 1" swivel clasp
- One swivel hook on chain
- Two 3/16" eyelets, plus attaching tool
- One ¾"-1" diameter split ring
- ¼ yard of ½" wide ribbon (for the zipper pull)
- Liquid seam sealant

Cutting Directions:

Fabric

- Cut one 5½" square (for back of pouch)
- Cut two 2¾" x 5½" pieces (for front of pouch)
- Cut one 3" x 16" piece (for collar)

Interfacing

- Cut one 5½" square
- Cut two 2¾" x 5½" pieces

Webbing

- Cut one 15" length (for collar)

Note: Remaining piece of webbing is used for leash; Length can be adjusted


Sewing Directions:

Key Pouch

1. Apply the fusible interfacing pieces to the wrong side of the corresponding size fabric pieces, following the interfacing manufacturer's recommendations for application.
2. With right sides of the fabrics facing together, machine-baste the two 2¾" x 5½" fabric pieces along one 5½" edge using a 1" seam allowance.
3. Press the seam open as preparation for installing the zipper.
4. Shorten the zipper from 6" to 5" in length by first zigzag stitching across the zipper coil to form a new zipper stop, then cut off the excess zipper and zipper tape.
5. Use the center zipper application method to install the zipper.
6. Remove the basting stitches and open the zipper. With right sides facing together, place the zippered piece to the 5½" back square. Pin them together.
7. Stitch all around the four sides of the pouch square using a ½" seam allowance.
8. Trim the four corners to reduce bulk, then turn the pouch right side out and press.
9. Attach and eyelet to the upper left corner of the pouch, approximately ½" from the top and side edge. Slide the split ring through the eyelet of the pouch.
10. Fold the ribbon piece in half, inserting the loop through the hole in the zipper tab. Pull the ribbon tails through the top to tighten and form the zipper pull.

Dog Collar

1. Turn under and press a ½" hem on all four sides of the collar fabric piece.
2. Fold the piece, wrong sides together, so it measures 1" in width.
3. Place the webbing inside the pressed fabric collar piece and pin.
4. Topstitch close to edge on all sides.
5. Slip one end of the collar through one end of the buckle, leaving a 2¼" "tail".
6. Slide the D-ring onto the collar, positioning under the "tail" and bring toward buckle.
7. Topstitch the tail end to the collar. Stitch it again to reinforce.
8. Slide the D-ring toward the stitching. Stitch again about ¼" from the first stitching.

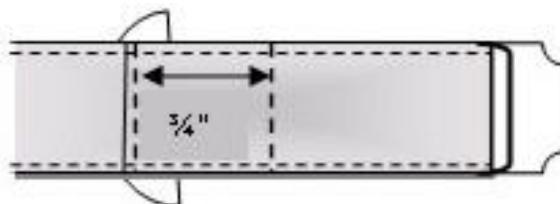

9. Slide the remaining end of the collar through the remaining buckle section.
10. Buckle the collar on the dog and adjust to the desired length. Stitch the collar end securely in place.

Dog Leash

1. Trim the webbing to the desired length for the leash. To secure the cut ends of the webbing strip, first use a zigzag stitch and then apply liquid seam sealant to the sewn ends. Allow to dry thoroughly.
2. Slide one end of the webbing through the swivel clasp. Turn down the end 1¼” and stitch close to the zigzag stitching. Stitch again to reinforce.
3. Fold down 7½” on the other end of the leash, forming the handle.
4. Securely stitch down the end.
5. Attach the eyelet ½” from the stitching on the handle.
6. Attach the swivel hook on the chain through the eyelet on the handle.
7. Slide the split ring attach to the key pouch thorough the last link on the change to finish.